

> Wall frame BCM 350



**NARROW
FRONT FLUSH PLATE**




DESCRIPTION

- For installing a wall hung-standard, extended or compact WC
- Self-supporting wall frame for dry cladding bearing a 400kg load, NF approved
- Designed for wall installation
- Steel tube structure, 30x30x1,5mm, electro-welded and anti-corrosion treated (epoxy paint withstanding 200 hours of salt spray), NF approved
- WC fixing using threaded rods (no need to cut them) and with possible adjustment after cladding completion
- Feet are made from epoxy painted steel plate (100x30x8mm) and electro-welded epoxy painted steel tubes (25x25x3mm), fixed to the floor
- Can be fixed to the wall using 2 fixing brackets
- 6 litre cistern insulated against condensation, from which components can be maintained through the flush plate window. Conforms to NF, EN 14055 Class 2 flushing standards, BREEAM requirements and UK Building Regulations
- Dual flush outlet valve, 6/4 litres factory preset, adjustable to 4/2.6 litres on site, NF approved
- Water saving and quiet fill delayed action inlet valve, NF approved
- Choice of mechanical dual flush, infra-red or anti-vandal single flush front flush plates

Connections:

- Water inlet connection on the inside of the cistern with 1/2" brass isolating valve
- Supplied with 90° outlet bend, which can be easily fixed on the frame by simply clipping it
- Supplied with accessories for protection during the construction phase

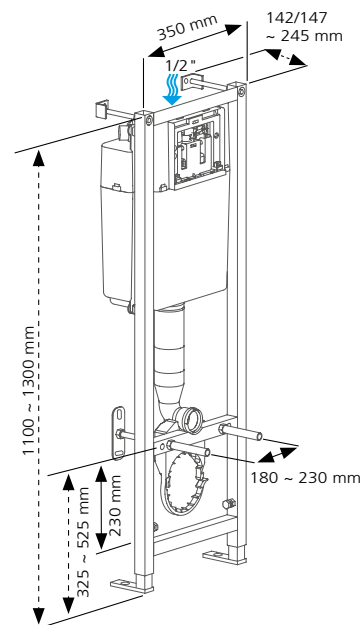

TEXT FOR TENDERS:

BCM 350

Ref.: 31 2315 13

Wall frame for wall hung WC, NF approved components, 10-year guarantee, 6 supporting wall fixing points and 2 floor fixing points. Adjustable height from 1100 to 1300 mm, width 350 mm, adjustable depth from 147 to 245 mm. Factory preset flush at 6/4 litres, insulated cistern equipped with a dual flush outlet valve and a water saving and quiet fill delayed action inlet valve. Water inlet connection on the inside of the cistern fitted with an integral isolating valve. Front flush plate actuation.


Supplied with 90° outlet bend made from PVC and WC connector.

Supplied without flush plate.

	Ref.	Barcode	Packing	Packing			Pallet quantity
				Nb	M ³	Kg	
BCM 350	31 2315 13	3 24723 002022 5	Carton	1	0,07	15,82	28

SUPPLEMENTS

Flush platesp. 36



1 = 142/147~245 mm

2 = 16 ~ 100 mm

4 = 0 ~ 200 mm

if 3 = 400 => 4 = 200 mm max*

if 3 = 480 => 4 = 120 mm max*

*When the distance between the WC fixing axle and the WC seat is 75 mm.

SIAMP